




Look  
inside



eptarefrigeration

COLDISTRICT


VENDING MACHINES

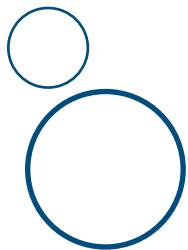

eptarefrigeration

Our refrigerated cabinets are highly advanced and sustainable, offering unbeatable reliability when it comes to keeping up with the latest market trends in the food and beverage sector.

**Sustainable innovation, quality, and reliability are our plug-in power.**

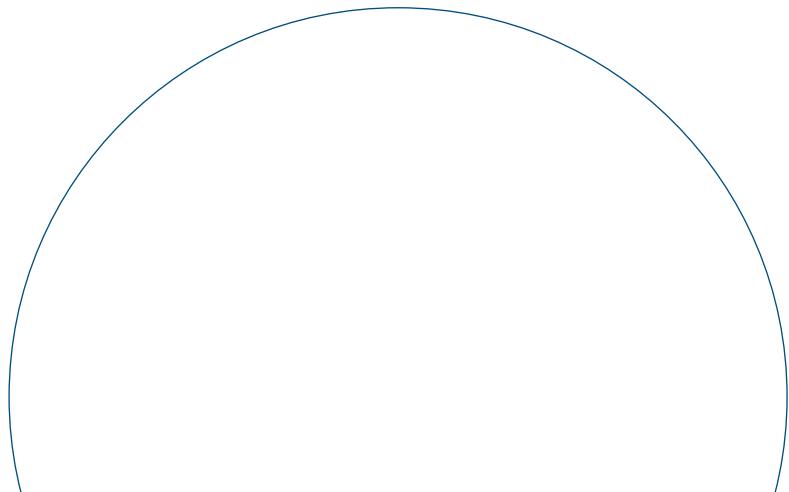

# LOOK INSIDE, DIVE INTO A NEW SEASON OF FRESHNESS



**IARP solutions** revolutionises the interaction with the consumers. They are actively engaged consumers, intrigued by the showcases and their content, encouraged to take a step forward and **look inside to discover a new world of freshness.**



**IARP** combines a unique mix of **advanced and sustainable technologies** with an innovative approach. Aimed at leading progress in the Food & Beverage and Ho.Re. Ca. industries, it elevates the overall experience of Operators to a new level of satisfaction.

## SUSTAINABILITY, DIGITISATION AND CUSTOMER INTIMACY: IARP DRIVERS

**Sustainability, digitisation** and **customer intimacy** are cornerstones at the heart of Iarp and find concrete expression in the development of increasingly **efficient, versatile,** and **technologically advanced** solutions.



**Sustainability:** offering **plug-ins with low energy consumption** for a more responsible resource management, fully respecting the principles of Ecodesign and the make-use-recycle circular economy paradigm.



Coldistrict range embraces **digitalization** equipping all the vendings with protocols like MDB, Executive, and DDCMP. These enable seamless transactions, remote monitoring, and efficient data management, enhancing overall efficiency and customer experience.



**Customer Intimacy:** consolidating **lasting relationships** with Customers, where active analysis of market trends paves the way for synergistic collaborations to personalise existing solutions or develop new ones.

## FEATURES VENDING MACHINES



### FALL SENSOR

Detects product dropping and suspends payment in case of non-dropping



### MDB - Executive - DDCMP

Protocols compliant with telemetry, machine monitoring and payment systems



### RIELDA LOCK

Reprogrammable lock. Allows you to replace the key in use without replacing the lock



### SHELVES CUSTOMIZATION TOOLLESS

Possibility of repositioning drawers inside the vending machine without the need for tools



### ELECTRONIC PRICE DISPLAY

Remotely programmable, it gives the possibility to show other information than just the price



### TOUCH DISPLAY

4,3 inch, customisable via USB. Assures a seamless customer experience



### BASKET MODE

Possibility to select three different products in the same purchase. Available as software upgrade



### CLIMATIC CLASS 4

Temperature stratification to maintain product integrity, ensuring references' optimal preservation and quality

FULL RANGE



BRERA + BRERASLAVE

CHELSEA



TROCADERO

BROOKLYN

PLUG-IN POWER 


# BRERA MASTER

STANDARD CONFIGURATION

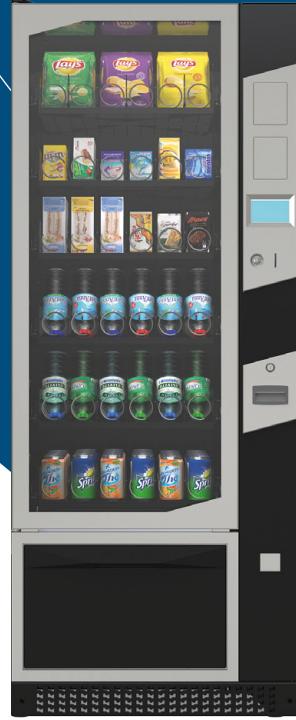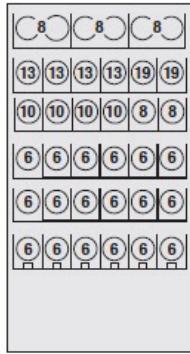

# BRERA SLAVE

STANDARD CONFIGURATION

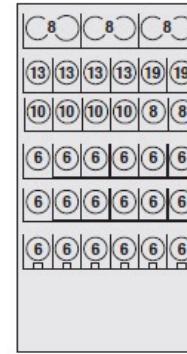

## TECHNICAL SPECIFICATIONS

A T G C

**BRERA PRO ( MASTER )**

A T G B

**BRERA BOOST ( MASTER )**

Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Cabinet Dimensions WxDxH ( mm )	743x835x1834	743x835x1834
Gross - Net Volume ( Lt )	534 - 452	534 - 452
Cooling System	Ventilated - ON/OFF	Ventilated - Variable speed
Defrosting System	Automatic	Automatic
Climatic Class	4 / M2	4 / M2
Refrigerant Gas	R290	R290
Internal Light	LED	LED
Gross / Net Weight ( Kg )	225 - 215	225 - 215
Packaging Dimensions WxDxH ( mm )	786x930x1954	786x930x1954
Internal color	Black	Grey

## OPTIONS

1 SHELF  
ETL

1 SHELF  
ETL\*

## TECHNICAL SPECIFICATIONS

A T G C

**BRERA PRO ( SLAVE )**

A T G B

**BRERA BOOST ( SLAVE )**

Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Cabinet Dimensions WxDxH ( mm )	636x835x1834	636x835x1834
Gross - Net Volume ( Lt )	534 - 452	534 - 452
Cooling System	Ventilated - ON/OFF	Ventilated - Variable speed
Defrosting System	Automatic	Automatic
Climatic Class	4 / M2	4 / M2
Refrigerant Gas	R290	R290
Internal Light	LED	LED
Gross / Net Weight ( Kg )	199 - 190	199 - 190
Packaging Dimensions WxDxH ( mm )	678x930x1954	678x930x1954
Internal color	Black	Grey

## OPTIONS

1 SHELF  
ETL



1 SHELF  
ETL\*

\*Energy class data may differ after the installation of optional accessories

\*Energy class data may differ after the installation of optional accessories


# CHELSEA

STANDARD CONFIGURATION

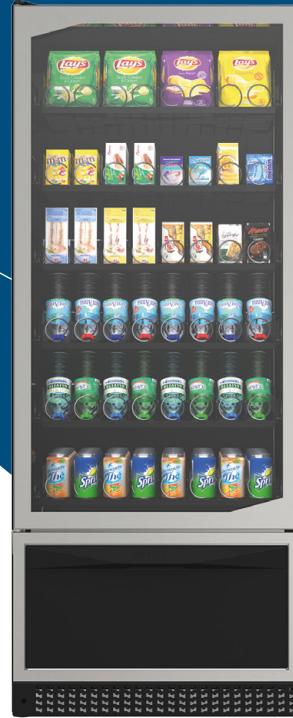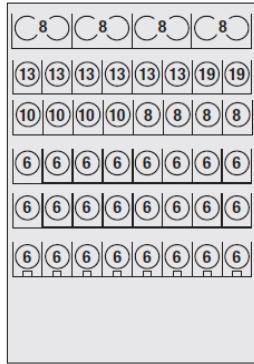

# TROCADERO

STANDARD CONFIGURATION

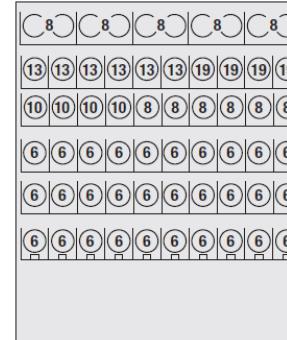

## TECHNICAL SPECIFICATIONS

A T G C

### CHELSEA PRO

A T G B

### CHELSEA BOOST

Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Cabinet Dimensions WxDxH ( mm )	898x835x1834	898x835x1834
Gross - Net Volume ( Lt )	700 - 592	700 - 592
Cooling System	Ventilated - ON/OFF	Ventilated - Variable speed
Defrosting System	Automatic	Automatic
Climatic Class	4 / M2	4 / M2
Refrigerant Gas	R290	R290
Internal Light	LED	LED
Gross / Net Weight ( Kg )	265 - 255	265 - 255
Packaging Dimensions WxDxH ( mm )	945x930x1954	945x930x1954
Internal color	Black	Grey

## OPTIONS

1 SHELF  
ETL

1 SHELF  
ETL\*

## TECHNICAL SPECIFICATIONS

A T G C

### TROCADERO PRO

A T G B

### TROCADERO BOOST

Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Cabinet Dimensions WxDxH ( mm )	1052x835x1834	1052x835x1834
Gross - Net Volume ( Lt )	866 - 732	866 - 732
Cooling System	Ventilated - ON/OFF	Ventilated - Variable speed
Defrosting System	Automatic	Automatic
Climatic Class	4 / M2	4 / M2
Refrigerant Gas	R290	R290
Internal Light	LED	LED
Gross / Net Weight ( Kg )	335 - 325	335 - 325
Packaging Dimensions WxDxH ( mm )	1108x930x1954	1108x930x1954
Internal color	Black	Grey

## OPTIONS

1 SHELF  
ETL



1 SHELF  
ETL\*

\*Energy class data may differ after the installation of optional accessories

\*Energy class data may differ after the installation of optional accessories

# BROOKLYN

## STANDARD CONFIGURATION

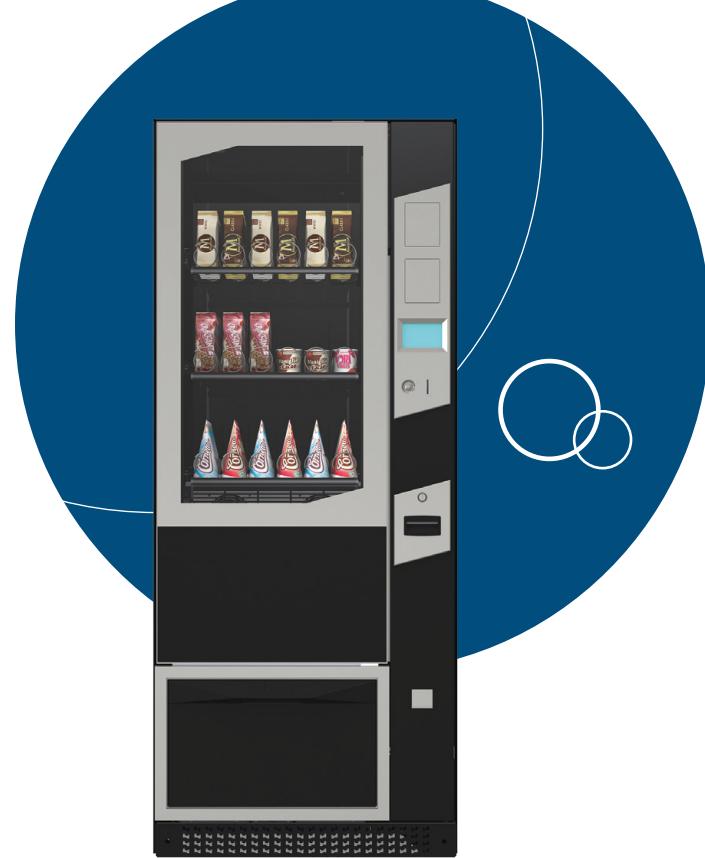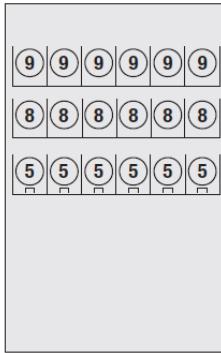

## TECHNICAL SPECIFICATIONS

### BROOKLYN PRO

Temperature	-25° ÷ -18°C
Cabinet Dimensions WxDxH ( mm )	748x835x1827
Gross - Net Volume ( Lt )	323 - 264
Cooling System	Ventilated
Defrosting System	Automatic
Climatic Class	4 / L1
Refrigerant Gas	R290
Internal Light	LED
Gross / Net Weight ( Kg )	223 - 208
Packaging Dimensions WxDxH ( mm )	800x930x1954
Internal color	Black

## OPTIONS

1 SHELF


# STIK



## TECHNICAL SPECIFICATIONS

### STIK 280N

Temperature	-25° ÷ -18°C
Cabinet Dimensions WxDxH ( mm )	466x770x1830
Gross - Net Volume ( Lt )	280 - 257
Cooling System	Static
Defrosting System	Manual
Climatic Class	4 / L1
Refrigerant Gas	R290
Gross / Net Weight ( Kg )	99 - 92
Packaging Dimensions WxDxH ( mm )	520x920x1965
Internal color	Black

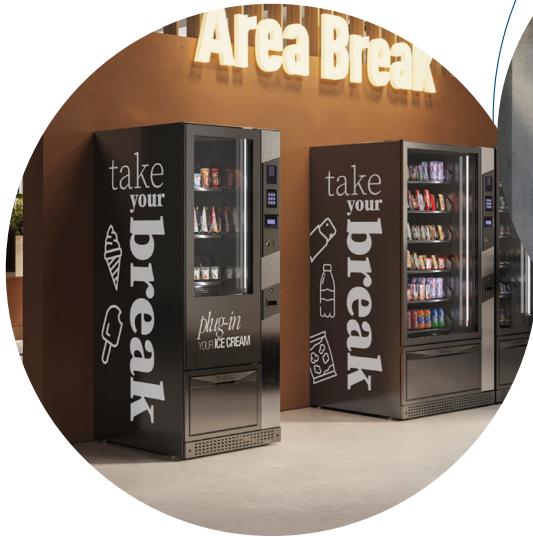

A fully-fledged specialisation. Vending machines for fresh food with an exclusive plus-point: a solution also designed with the world of Frozen Foods in mind.

**GREEN EFFICIENCY:** Coldistrict range units are all refrigerated with propane gas, reflecting the sustainable innovation and evolved technological ethics of the Epta Group.

**VARIETY AND FLEXIBILITY:** the range features a number of models and configurations, both in slave and master versions. The exterior is always customisable.

**PERFECT ANYWHERE:** in office refreshment and relaxation areas, train and underground stations and in automatic vending stores. Greater connectivity, with easier maintenance.

# COLDISTRICT



IARP, the specialist of refrigerated plug-in cabinets, introduces the COLDISTRICT range of vending solutions, perfect for Chilled and Frozen products.



**eptarefrigeration**

[www.iarp-plugin.com](http://www.iarp-plugin.com)

*PLUG-IN POWER*



Follow us on:     Epta's channels